

A rack and pinion gate consists of a gate frame, blade, rack(s), pinion gear(s), pinion shaft, shaft bearings and a manual or powered shaft drive. Some larger manual drives may incorporate v-belts and/or gear boxes for mechanical advantage. Most powered rack and pinion gates will incorporate some type of mechanical advantage between the driver and pinion shaft.



Rack and pinion gates are used generally as maintenance gates ahead of feeders and other equipment. Due to their simple construction, rack and pinion gates can be relied on to operate after months of inactivity. This is especially important in powerhouse and industrial applications.

Due to their limited actuating speed, rack and pinion gates are rarely used to regulate flow into a process or onto a conveyor; however, they are sometimes used to discharge small hoppers that always discharge completely. For example, a rock bin that has a maximum capacity of one truckload may use a rack and pinion gate to shut off flow when a truck is not being loaded.

Rack and pinion gates larger than 1500mm are seldom economical due to high operating forces and the resulting expensive drive hardware.

Applications

Some typical applications include:

- 600mm to 1200mm rack and pinion gates can be used to load trucks from small coal or rock bins.
- As maintenance gates ahead of coal feeders, pulverizers, crushers, and alternate process systems.
- Most flow control applications not requiring high blade speed.
- Emergency shut off gates to allow maintenance of downstream equipment without unloading the material in storage.

Actuators

The actuators available for use on rack and pinion gates are:

- Hand wheel, chain fall, or ratchet
- Hand wheel, chain fall or ratchet attached to a gearbox
- Electric motor attached to a gearbox
- Hydraulic or air motor attached to a gearbox
- Commercially available rotary actuators

Seals


Seals are available for a wide range of applications including:

- To prevent or reduce escaping dust
- To isolate the gate from vibration.
- To prevent the transfer of forces between the gate and other structure or equipment.
- To prevent the escape of water or to direct the water to a collection point.

Position Indication

Especially for totally sealed gates, it is important to have a method of determining the position of the gate blade. For some gates it is necessary to determine when they are closed, for others when they are open and for others when they are both open and closed. Some of the devices available to determine the gate blade position are:

- A limit switch can be used to detect the closed, open or any pre set intermediate position.
- A proximity switch can be used to detect the closed, open or any pre set intermediate position.
- A sensor can be used to continually detect the gate blade position.
- For visual indication, a rod attached to the gate blade can be extended outside the gate through a grommet to indicate the blade position.
- Integral position indication is available from actuator manufacturers to indicate the gate blade position.

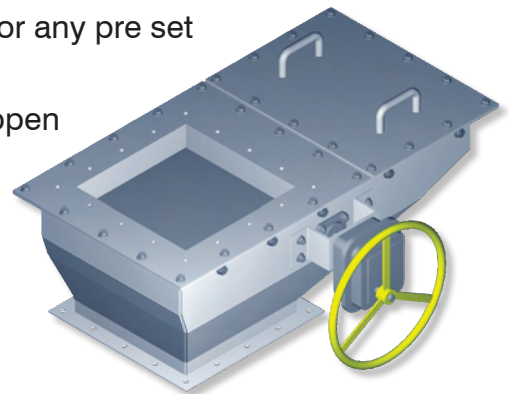

Construction Materials

Rack and pinion gates can be fabricated from or equipped with a wide range of construction materials depending on the characteristics of the bulk material being handled. Some examples of construction materials for different applications are:

- Carbon Steel with abrasion resistant liners to protect the blade supports can be used for most applications
- Polished stainless steel blade liners can be used to reduce the friction between the bulk material and the gate blade thereby reducing the force required to open the blade.
- Stainless steel can be used in all areas in contact with acidic material to prevent corrosion. In some instances it may be necessary to fabricate the entire gate from stainless steel.
- Blade supports can be commercially available needle bearing rollers, fabricated stainless steel rollers or low friction plastic slide bearings.
- The shafting, racks, and pinion gears can be manufactured from a wide range of alloys to suite the application.

NSW

Wyong - Head Office

10 Hereford Street, Berkeley Vale NSW 2261
PO Box 5010 Chittaway NSW 2261
Tel: +61 (0)2 4389 6191
Fax: +61 (0)2 4389 6199
Email: info@hmagroup.com.au

GnXbYm

#%E [d]ge DaSV, >S` W5ahWNSW 206(
Tel: +61 (0)2 94\$* 7300
Fax: +61 (0)2 94\$* 7399
Email: ekV` Wk@hmagroup.com.au

VIC

Melbourne

PO Box 204, Narre Warren VIC 3805
Mobile: +61 (0)429 176 688
Email: melbourne@hmagroup.com.au

Morwell

8 Jones Road, Morwell VIC 3840
PO Box 647, Morwell VIC 3840
Tel: +61 (0)3 5136 8400
Fax: +61 (0)3 5136 8499
Email: morwell@hmagroup.com.au

SA


Adelaide

PO Box 1280, North Haven SA 5018
Tel: +61 (0)8 8341 8067
Fax: +61 (0)8 8341 8067
Mobile: +61 (0)437 460 032
Email: adelaide@hmagroup.com.au

WA

Perth

119 Dowd Street, Welshpool WA 6106
Tel: +61 (0)8 6254 9500
Fax: +61 (0)8 6254 9599
Email: perth@hmagroup.com.au

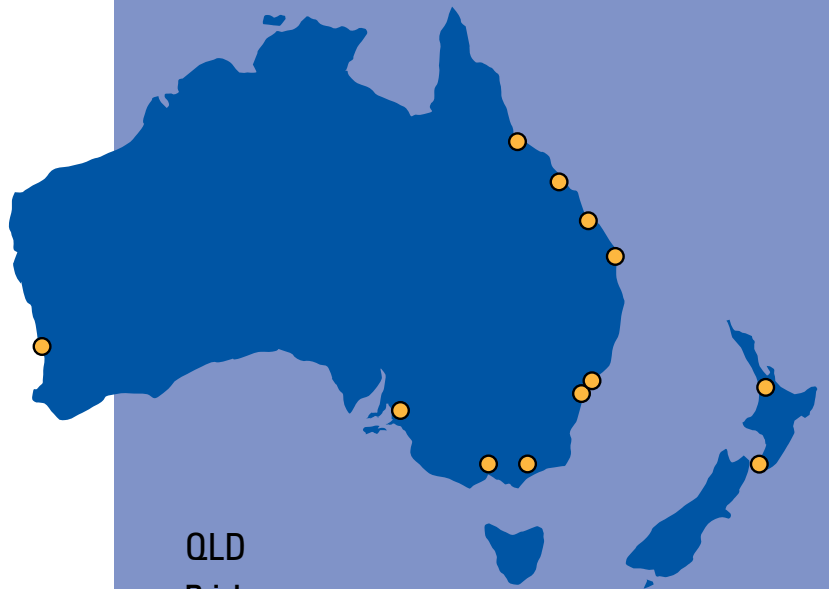

QLD

Brisbane

3rd Floor, 49 Sherwood Road, Toowong QLD 4066
PO Box 106, Toowong QLD 4066
Tel: +61 (0)7 3859 6800
Fax: +61 (0)7 3859 6869
Email: brisbane@hmagroup.com.au

Mackay

22-30 Southgate Drive,
Southgate Industrial Park, Paget QLD 4740
PO Box 6221, Mackay Mail Centre QLD 4741
Tel: +61 (0)7 4998 6900
Fax: +61 (0)7 4998 6999
Email: mackay@hmagroup.com.au

Gladstone

9 Neil St, Gladstone QLD 4680
PO Box 1731, Gladstone QLD 4680
Tel: +61 (0)7 4978 3128
Fax: +61 (0)7 4978 3127
Email: gladstone@hmagroup.com.au

Townsville

PO Box 347, Aitkenvale QLD 4814
Tel: +61 (0)7 4728 6300
Fax: +61 (0)7 4728 6388
Mobile: +61 (0)417 996 694
Email: townsville@hmagroup.com.au

NEW ZEALAND

Hamilton

Unit 14, 9 Karewa Place, Pukete, Hamilton NZ 3200
PO Box 10102, Te Rapa, Hamilton NZ 3241
Tel: +64 (0)7 847 1880
Fax: +64 (0)7 847 1883
Email: hamilton@hmagroup.co.nz

Wellington

Tel: +64 (0)7 847 1880
Fax: +64 (0)7 847 1883
Mobile: +64 272 612 744
Email: wellington@hmagroup.co.nz